

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 170 982 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**09.01.2002 Bulletin 2002/02**

(51) Int Cl.7: **H05G 2/00, G03F 7/20**

(21) Application number: **01305671.8**

(22) Date of filing: **29.06.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Bijkerk, Frederik  
Amsterdam (NL)
- Zukavishvili, Givi Georgievitch  
Troitsk, Moscow (RU)
- Korop, Evgenii Dmitreevitch  
Troitsk, Moscow (RU)
- Ivanov, Vladimir Vital'evitch  
Moscow (RU)

(30) Priority: **03.07.2000 EP 00202304**

(71) Applicant: **ASM LITHOGRAPHY B.V.**  
**5503 LA Veldhoven (NL)**

(74) Representative: **Leeming, John Gerard**  
**J.A. Kemp & Co., 14 South Square, Gray's Inn**  
**London WC1R 5LX (GB)**


(72) Inventors:  
• **Koshelev, Konstantin Nikolaevitch**  
**Troitsk, Moscow (RU)**

(54) **Radiation source, lithographic apparatus, device manufacturing method, and device manufactured thereby**

(57) A radiation source comprises an anode and a cathode for creating a discharge in a gas or vapor in a space between anode and cathode and to form a plasma of a working gas or vapor so as to generate electromagnetic radiation. The cathode comprises a hollow cavity having an aperture that has a substantially annu-

lar configuration around a central axis of said radiation source for initiating the discharge. A driver gas or vapor is supplied to the cathode cavity and the working gas or vapor is supplied in a region around the central axis in between anode and cathode. The working gas or vapor may comprise xenon, lithium vapor and tin vapor.

**Fig.3.**

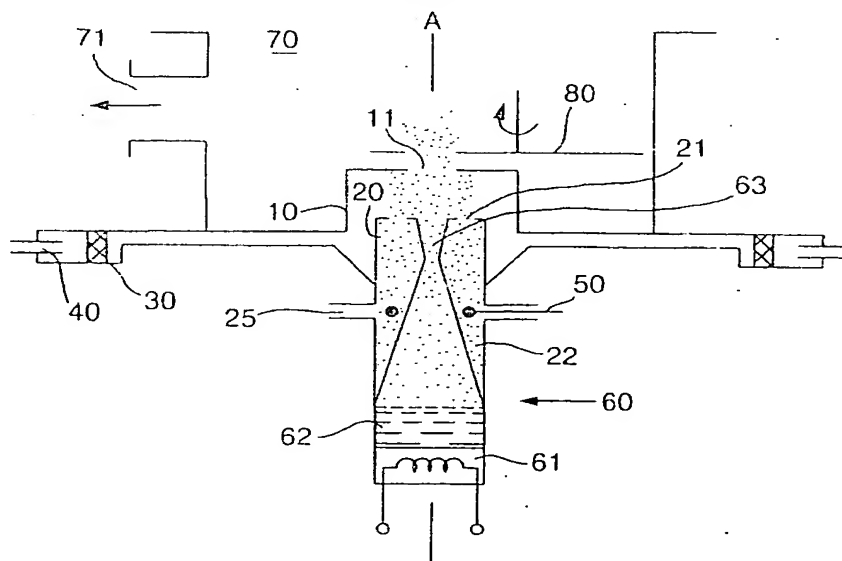

**EP 1 170 982 A1**

## Description

**[0001]** The present invention relates to a radiation source comprising an anode and a cathode that are configured and arranged to create a discharge in a gas or vapor in a space between said anode and cathode and to form a plasma of a working gas or vapor so as to generate electromagnetic radiation. Further, the invention relates to a lithographic projection apparatus having such a radiation source and comprising:

- a radiation system for supplying a projection beam of radiation;
- a support structure for supporting patterning means, the patterning means serving to pattern the projection beam according to a desired pattern;
- a substrate table for holding a substrate; and
- a projection system for projecting the patterned beam onto a target portion of the substrate.

**[0002]** The term "patterning means" as here employed should be broadly interpreted as referring to means that can be used to endow an incoming radiation beam with a patterned cross-section, corresponding to a pattern that is to be created in a target portion of the substrate; the term "light valve" can also be used in this context. Generally, the said pattern will correspond to a particular functional layer in a device being created in the target portion, such as an integrated circuit or other device (see below). Examples of such patterning means include:

A mask. The concept of a mask is well known in lithography, and it includes mask types such as binary, alternating phase-shift, and attenuated phase-shift, as well as various hybrid mask types. Placement of such a mask in the radiation beam causes selective transmission (in the case of a transmissive mask) or reflection (in the case of a reflective mask) of the radiation impinging on the mask, according to the pattern on the mask. In the case of a mask, the support structure will generally be a mask table, which ensures that the mask can be held at a desired position in the incoming radiation beam, and that it can be moved relative to the beam if so desired;

A programmable mirror array. An example of such a device is a matrix-addressable surface having a viscoelastic control layer and a reflective surface. The basic principle behind such an apparatus is that (for example) addressed areas of the reflective surface reflect incident light as diffracted light, whereas unaddressed areas reflect incident light as undiffracted light. Using an appropriate filter, the said undiffracted light can be filtered out of the reflected beam, leaving only the diffracted light behind; in this manner, the beam becomes patterned according to the addressing pattern of the matrix-addressable

surface. The required matrix addressing can be performed using suitable electronic means. More information on such mirror arrays can be gleaned, for example, from United States Patents US 5,296,891 and US 5,523,193, which are incorporated herein by reference. In the case of a programmable mirror array, the said support structure may be embodied as a frame or table, for example, which may be fixed or movable as required; and

A programmable LCD array. An example of such a construction is given in United States Patent US 5,229,872, which is incorporated herein by reference. As above, the support structure in this case may be embodied as a frame or table, for example, which may be fixed or movable as required.

**[0003]** For purposes of simplicity, the rest of this text may, at certain locations, specifically direct itself to examples involving a mask and mask table; however, the general principles discussed in such instances should be seen in the broader context of the patterning means as hereabove set forth.

**[0004]** Lithographic projection apparatus can be used, for example, in the manufacture of integrated circuits (ICs). In such a case, the patterning means may generate a circuit pattern corresponding to an individual layer of the IC, and this pattern can be imaged onto a target portion (e.g. comprising one or more dies) on a substrate (silicon wafer) that has been coated with a layer of radiation-sensitive material (resist). In general, a single wafer will contain a whole network of adjacent target portions that are successively irradiated via the projection system, one at a time. In current apparatus, employing patterning by a mask on a mask table, a distinction can be made between two different types of machine. In one type of lithographic projection apparatus, each target portion is irradiated by exposing the entire mask pattern onto the target portion in one go; such an apparatus is commonly referred to as a wafer stepper. In an alternative apparatus — commonly referred to as a step-and-scan apparatus — each target portion is irradiated by progressively scanning the mask pattern under the projection beam in a given reference direction (the "scanning" direction) while synchronously scanning the substrate table parallel or anti-parallel to this direction; since, in general, the projection system will have a magnification factor  $M$  (generally  $< 1$ ), the speed  $V$  at which the substrate table is scanned will be a factor  $M$  times that at which the mask table is scanned. More information with regard to lithographic devices as here described can be gleaned, for example, from US 6,046,792, incorporated herein by reference.

**[0005]** In a manufacturing process using a lithographic projection apparatus, a pattern (e.g. in a mask) is imaged onto a substrate that is at least partially covered by a layer of radiation-sensitive material (resist). Prior to this imaging step, the substrate may undergo various procedures, such as priming, resist coating and a soft

bake. After exposure, the substrate may be subjected to other procedures, such as a post-exposure bake (PEB), development, a hard bake and measurement/inspection of the imaged features. This array of procedures is used as a basis to pattern an individual layer of a device, e.g. an IC. Such a patterned layer may then undergo various processes such as etching, ion-implantation (doping), metallization, oxidation, chemo-mechanical polishing, etc., all intended to finish off an individual layer. If several layers are required, then the whole procedure, or a variant thereof, will have to be repeated for each new layer. Eventually, an array of devices will be present on the substrate (wafer). These devices are then separated from one another by a technique such as dicing or sawing, whence the individual devices can be mounted on a carrier, connected to pins, etc. Further information regarding such processes can be obtained, for example, from the book "Microchip Fabrication: A Practical Guide to Semiconductor Processing", Third Edition, by Peter van Zant, McGraw Hill Publishing Co., 1997, ISBN 0-07-067250-4, incorporated herein by reference.

[0006] For the sake of simplicity, the projection system may hereinafter be referred to as the "lens"; however, this term should be broadly interpreted as encompassing various types of projection system, including refractive optics, reflective optics, and catadioptric systems, for example. The radiation system may also include components operating according to any of these design types for directing, shaping or controlling the projection beam of radiation, and such components may also be referred to below, collectively or singularly, as a "lens". Further, the lithographic apparatus may be of a type having two or more substrate tables (and/or two or more mask tables). In such "multiple stage" devices the additional tables may be used in parallel, or preparatory steps may be carried out on one or more tables while one or more other tables are being used for exposures. Twin stage lithographic apparatus are described, for example, in US 5,969,441 and WO 98/40791, incorporated herein by reference.

[0007] In a lithographic apparatus the size of features that can be imaged onto the wafer is limited by the wavelength of the projection radiation. To produce integrated circuits with a higher density of devices, and hence higher operating speeds, it is desirable to be able to image smaller features. Whilst most current lithographic projection apparatus employ ultraviolet light generated by mercury lamps or excimer lasers, it has been proposed to use shorter wavelength radiation of around 13 nm. Such radiation is termed extreme ultraviolet, also referred to as XUV or EUV, radiation. The abbreviation 'XUV' generally refers to the wavelength range from several tenths of nm to several tens of nanometers, combining the soft x-ray and Vacuum UV range, whereas the term 'EUV' is normally used in conjunction with lithography (EUVL) and refers to a radiation band from approximately 5 to 20 nm, i.e. part of the XUV range.

[0008] A radiation source for XUV radiation may be a discharge plasma radiation source, in which a plasma is generated by a discharge in a gas or vapor between an anode and a cathode and in which a high temperature discharge plasma may be created by Ohmic heating by a (pulsed) current flowing through the plasma. Further, compression of a plasma having some volume due to a magnetic field generated by a current flowing through the plasma may be used to create a high temperature, high density plasma on a discharge axis (dynamical pinch effect). Kinetic energy of the pinching plasma is directly transferred to the plasma temperature and hence to short-wavelength radiation. A dynamical pinch would allow for a discharge plasma having a considerably higher temperature and density on the discharge axis, offering an extremely large conversion efficiency of stored electrical energy into thermal plasma energy and thus into XUV radiation.

[0009] It has been proposed by R. Lebert, K. Bergmann, G. Schriever and W. Neff in a presentation entitled 'A gas discharge based radiation source for EUVL', Sematech Workshop Monterey (1999), to employ a hollow cathode for triggering plasma creation. A very effective way of self-initiation of a discharge may be obtained by a so-called transient hollow cathode discharge (THCD) in the hollow cathode. The radiation source as proposed by Lebert *et al.* is an axi-symmetric system with a specially configured cathode having a small aperture on-axis with a large cavity behind it forming a hollow cathode region. However, the hollow cathode generates the discharge breakdown and thus a plasma only on or in a small volume around the discharge axis, which does not allow making (full) use of the dynamical pinch effect referred to above. Further, the volume taken by a plasma around the discharge or central axis is generally badly controllable and its stagnation on the discharge axis after compression is therefore not sufficiently predictable to have an exactly timed pulse of generated XUV radiation.

[0010] Another drawback of a plasma discharge radiation source having the conventional central hollow cathode is that the plasma created may erode and change the form of the aperture of the hollow cathode, since it is present on the axis on which the high temperature plasma having a considerable density is created. The aperture will therefore be damaged by unavoidable axially oriented plasma jets, which limits the lifetime of the cathode and decreases the maintenance interval of the radiation source. Further, proper functioning of the hollow cathode for triggering the plasma is dependent on a predetermined relation between size of the aperture and depth of the cavity. Erosion of the aperture therefore undesirably influences the triggering instant of the plasma and the timing of the pulse of generated XUV radiation.

[0011] It is an object of the invention to provide a radiation source having an effective self-initiation that allows making use of the dynamical pinch effect to create

a high-temperature, high-density plasma for an enhanced conversion efficiency of electrical energy into radiation.

**[0012]** Another object of the invention is to provide a radiation source having a long maintenance interval.

**[0013]** It is yet another object of the invention to provide a radiation source having a well-defined timing of generated pulses, or shots, of XUV radiation.

**[0014]** According to the present invention there is provided a radiation source comprising an anode and a cathode that are configured and arranged to create a discharge in a gas or vapor in a space between said anode and cathode and to form a plasma of a working gas or vapor so as to generate electromagnetic radiation, wherein said cathode comprises a hollow cavity having an aperture that has a substantially annular configuration around a central axis of said radiation source so as to initiate said discharge. The working gas or vapor may comprise xenon, lithium vapor or tin vapor.

**[0015]** The present invention provides that the discharge is being initiated by the annular hollow cathode at a predetermined distance from a central axis of the radiation source and takes advantage of the dynamical pinch effect. The discharge is created at least at a distance from the central axis corresponding to the annular aperture so as to create an initial plasma. An electrical current flowing through the plasma between anode and cathode generates a magnetic field compressing the plasma from the distance (or radius) corresponding to the annular aperture towards the central axis so as to create a dense and hot plasma.

**[0016]** The discharge plasma created above the annular aperture may be chosen to have a low density such as not to cause erosion of the aperture. Both the density of the plasma and its distance to the annular aperture will increase upon compression towards the central axis. The distance of annular aperture may be chosen large enough not to cause erosion of the aperture at the final stagnation, or collapse, of the plasma on the central axis.

**[0017]** Further, the predetermined distance between annular hollow cathode provides a control radius where plasma compression starts, which results in a well-controllable timing of its collapse and generation of a pulse of XUV radiation.

**[0018]** In preferred embodiments a driver gas or vapor is supplied to said cavity. Further, the working gas or vapor is conveniently supplied in a region around said central axis of said space between said anode and cathode. In such embodiments control over the generation of pulses of XUV radiation is improved.

**[0019]** The hollow cathode provides for an effective self-organised discharge initiation having the practical feature that high repetition rates along with a high reproducibility may be achieved. The operation can basically be auto-triggered. To further increase the exact timing of the discharge and finally of the generation of a pulse of XUV radiation, a preferred embodiment of the

radiation source according to the invention comprises a trigger electrode that is inserted in the cavity. When the radiation source is in a state that auto-triggering is almost going to take place, a voltage pulse applied to the trigger electrode will cause such a disturbance of the electrical field inside the cavity that the process will trigger. Any uncertainty in the timing of auto-triggering will in this way be eliminated by exactly timing a trigger pulse being applied to the trigger electrode. Appropriate electrical circuitry is employed to apply a voltage pulse to said trigger electrode.

**[0020]** To provide for a stable shot-to-shot electrically stored energy and a very fast supply of electrical energy to anode and cathode, the radiation source may comprise a capacitor connected to said anode and cathode, and may further comprise a charging circuit connected to said capacitor, said charging circuit comprising a further capacitor and a transformer for electrically coupling said capacitor and said further capacitor. Switches may control charging of said capacitor by said further capacitor, and of said further capacitor by a source of electrical power.

**[0021]** An electrical insulator will be provided to separate anode and cathode. To prevent degradation of the insulator by lithium vapor or tin vapor, a path between a region of said space between said anode and cathode where said vapor is provided and said electrical insulator is constructed and arranged to define a space for said vapor to condense along said path.

**[0022]** According to a further aspect of the present invention there is provided a lithographic projection apparatus comprising:

a radiation system for providing a projection beam of radiation;

a support structure for supporting patterning means, the patterning means serving to pattern the projection beam according to a desired pattern;

a substrate table for holding a substrate; and

a projection system for projecting the patterned beam onto a target portion of the substrate,

wherein said radiation system comprises a radiation source as described above.

**[0023]** The present invention also provides a device manufacturing method comprising the steps of:

providing a substrate that is at least partially covered by a layer of radiation-sensitive material;

providing a projection beam of radiation using a radiation system comprising a radiation source as described above;

using patterning means to endow the projection beam with a pattern in its cross-section; and

projecting the patterned beam of radiation onto a target portion of the layer of radiation-sensitive material.

[0024] Although specific reference may be made in this text to the use of the apparatus according to the invention in the manufacture of ICs, it should be explicitly understood that such an apparatus has many other possible applications. For example, it may be employed in the manufacture of integrated optical systems, guidance and detection patterns for magnetic domain memories, liquid-crystal display panels, thin-film magnetic heads, etc. The skilled artisan will appreciate that, in the context of such alternative applications, any use of the terms "reticle", "wafer" or "die" in this text should be considered as being replaced by the more general terms "mask", "substrate" and "target portion", respectively.

[0025] In the present document, the terms "radiation" and "beam" are used to encompass all types of electromagnetic radiation, including ultraviolet radiation (e.g. with a wavelength of 365, 248, 193, 157 or 126 nm) and extreme ultraviolet radiation (XUV or EUV, e.g. having a wavelength in the range of 5 to 20 nm).

[0026] The present invention and its attendant advantages will be described below with reference to exemplary embodiments and the accompanying schematic drawings, in which like parts are indicated by like references, and in which:

Figure 1 depicts a lithographic projection apparatus comprising a radiation source according to the invention;

Figures 2a to 2e depict a radiation source according to a first embodiment of the invention and various stages of discharge initiation, plasma creation and plasma compression;

Figure 3 depicts a radiation source according to a second embodiment of the invention;

Figure 4 depicts a radiation source according to a third embodiment of the invention;

Figure 5 depicts an electrical scheme for charging a capacitor bank and for supplying a trigger pulse to a trigger electrode of a radiation source according to a fourth embodiment of the invention;

Figure 6 depicts a radiation source according to yet another embodiment of the invention; and

Figure 7 depicts a detail of an alternative embodiment of a part of the radiation source of figure 6.

#### Embodiment 1

[0027] Figure 1 schematically depicts a lithographic projection apparatus according to a particular embodiment of the invention. The apparatus comprises:

a radiation system Ex, IL, for supplying a projection beam PB of XUV radiation. In this particular case, the radiation system also comprises a radiation source LA;

a first object table (mask table) MT provided with a mask holder for holding a mask MA (e.g. a reticle), and connected to first positioning means for accurately

positioning the mask with respect to item PL; a second object table (substrate table) WT provided with a substrate holder for holding a substrate W (e.g. a resist-coated silicon wafer), and connected to second positioning means for accurately positioning the substrate with respect to item PL; and a projection system ("lens") PL for imaging an irradiated portion of the mask MA onto a target portion C (e.g. comprising one or more dies) of the substrate W.

As here depicted, the apparatus is of a reflective type (i.e. has a reflective mask). However, in general, it may also be of a transmissive type, for example (with a transmissive mask). Alternatively, the apparatus may employ another kind of patterning means, such as a programmable mirror array of a type as referred to above. Since no materials are known to date that will transmit EUV (XUV) radiation, the lens will generally also consist of reflective elements.

[0028] The source LA produces a beam of radiation. This beam is fed into an illumination system (illuminator) IL, either directly or after having traversed conditioning means, such as a beam expander, for example. The illuminator IL may comprise adjusting means for setting the outer and/or inner radial extent (commonly referred to as  $\sigma$ -outer and  $\sigma$ -inner, respectively) of the intensity distribution in the beam. In addition, it will generally comprise various other components, such as an integrator and a condenser. In this way, the beam PB impinging on the mask MA has a desired intensity distribution in its cross-section.

[0029] It should be noted with regard to figure 1 that the source LA may be within the housing of the lithographic projection apparatus, but that it may also be remote from the lithographic projection apparatus, the radiation beam which it produces being led into the apparatus (e.g. with the aid of suitable directing mirrors). The current invention and claims encompass both of these scenarios.

[0030] The beam PB subsequently intercepts the mask MA, which is held on a mask table MT. Having been selectively reflected by the mask MA, the beam PB passes through the lens PL, which focuses the beam PB onto a target portion C of the substrate W. With the aid of the second positioning means (and interferometric measuring means IF), the substrate table WT can be moved accurately, e.g. so as to position different target portions C in the path of the beam PB. Similarly, the first positioning means can be used to accurately position the mask MA with respect to the path of the beam PB, e.g. after mechanical retrieval of the mask MA from a mask library, or during a scan. In general, movement of the object tables MT, WT will be realized with the aid of a long-stroke module (coarse positioning) and a short-stroke module (fine positioning), which are not explicitly depicted in Figure 1. However, in the case of a wafer stepper (as opposed to a step-and-scan apparatus) the

mask table MT may just be connected to a short stroke actuator, or may be fixed.

**[0031]** The depicted apparatus can be used in two different modes:

1. In step mode, the mask table MT is kept essentially stationary, and an entire mask image is projected in one go (*i.e.* a single "flash") onto a target portion C. The substrate table WT is then shifted in the x and/or y directions so that a different target portion C can be irradiated by the beam PB;
2. In scan mode, essentially the same scenario applies, except that a given target portion C is not exposed in a single "flash". Instead, the mask table MT is movable in a given direction (the so-called "scan direction", *e.g.* the y direction) with a speed  $v$ , so that the projection beam PB is caused to scan over a mask image; concurrently, the substrate table WT is simultaneously moved in the same or opposite direction at a speed  $V = Mv$ , in which  $M$  is the magnification of the lens PL (typically,  $M = 1/4$  or  $1/5$ ). In this manner, a relatively large target portion C can be exposed, without having to compromise on resolution.

**[0032]** Figures 2a to 2e show a discharge plasma radiation source according to the invention. The source has cylindrical symmetry and comprises an anode 10 and a cathode 20 connected by an electrically insulating cylindrical wall 30. An aperture 11 is provided in anode 10 on central axis A for passing electromagnetic radiation from the source. Cathode 20 is provided with an annular aperture 21 around central axis A, and is further provided with a large cavity 22 behind aperture 21. Cavity 22 also has an annular configuration around central axis A, and the walls of the cavity are a part of cathode 20. Appropriate electrical circuitry (not shown in figures 2a-e) is connected to anode 10 and cathode 20 to provide for a pulsed voltage  $V$  across the anode-cathode gap inside the radiation source. Further, a suitable working gas or vapor, such as xenon or lithium vapor, at a certain pressure  $p$  is provided in between anode and cathode.

**[0033]** A discharge may take place at low initial pressure ( $p < 0.5$  Torr) and high voltage ( $V < 10$  kV) conditions, for which the electron mean free path is large compared to the dimension of the anode-cathode gap, so that Townsend ionisation is ineffective. Those conditions are characterised by a large electrical field strength over gas or vapor density ratio,  $E/N$ . This stage shows rather equally spaced equipotential lines EP having a fixed potential difference, as is depicted in figure 2a.

**[0034]** The ionisation growth is initially dominated by events inside the hollow cathode that operates at considerable lower  $E/N$ , resulting in a smaller mean free path for the electrons. Electrons  $e$  from hollow cathode 20, and derived from a driver gas or vapor within cavity 22, are injected into the anode-cathode gap, a virtual

anode being created with ongoing ionisation, which virtual anode propagates from anode 10 towards hollow cathode 20, bringing the full anode potential close to the cathode, as is shown in figure 2b by unevenly distributed equipotential lines EP. The electric field inside the hollow cavity 22 of cathode 20 is now significantly enhanced.

**[0035]** In the next phase, the ionisation continues, leading to a rapid development of a high density plasma region inside the hollow cathode, immediately behind the cathode aperture 21. Finally, injection of an intense beam of electrons from this region into the anode-cathode gap, also shown in figure 2b, forms the final breakdown channel. The configuration provides for a uniform pre-ionisation and breakdown in the discharge volume.

**[0036]** Figure 2c shows that a discharge has been initiated and a plasma of the working gas or vapor has been created in the anode-cathode gap. An electrical current will be flowing within the plasma from cathode 20 to anode 10, which current will induce an azimuthal magnetic field, having magnetic field strength  $H$ , within the radiation source. The azimuthal magnetic field causes the plasma to detach from the cylindrical wall 30 and to compress, as is schematically depicted in figure 2c.

**[0037]** Dynamic compression of the plasma will take place, as further depicted in figure 3d, because the pressure of the azimuthal magnetic field is much larger than the thermal plasma pressure:  $H^2/8\pi \gg nkT$ , in which  $n$  represents plasma particle density,  $k$  the Boltzmann constant and  $T$  the absolute temperature of the plasma. Electrical energy stored in a capacitor bank (not shown in figure 2) connected to anode 10 and cathode 20 will most efficiently be converted into energy of the kinetic implosion during the full time of the plasma compression. A homogeneously filled pinch with a high spatial stability is created.

**[0038]** At the final stage of plasma compression, *i.e.* plasma stagnation on central, or discharge, axis A, the kinetic energy of the plasma is fully converted into thermal energy of the plasma and finally into electromagnetic radiation having a very large contribution in the XUV and EUV ranges.

**[0039]** The radiation source according to the invention may be operated at a low initial pressure of the working gas in the anode-cathode gap to provide an easy interface of the source with a vacuum environment and to provide a better pre-ionisation in the discharge volume. Further, a low initial pressure and the hollow cathode concept allow a direct electrical coupling of a capacitor bank with the anode-cathode gap. A low initial pressure is compensated by a reasonable radius of the annular hollow cathode to yield a dense resulting pinched plasma on discharge axis A. The resulting density is important since the total radiated power scales with the density squared. By choosing a larger distance between annular hollow cathode and discharge axis, a pinched plasma with a higher density is obtained.

**[0040]** The processes described with regard to figures 2a to 2e also apply to the embodiments of the invention

which are disclosed below.

#### Embodiment 2

**[0041]** Figure 3 shows a second embodiment of a radiation source according to the invention. It shows the configuration of anode 10 and cathode 20, which are kept separated by an electrical insulator 30 and which are connected to a capacitor bank 40. A central part of the radiation source has cylindrical symmetry around central axis A. Figure 3 further shows annular cathode aperture 21 and annular cathode cavity 22 around central axis A.

**[0042]** A driver gas or vapor is supplied to cavity 22 via an inlet 25 so as to provide a low pressure within the cavity. In the present embodiment, argon (Ar) is taken as the driver gas, but basically any gas, such as for instance helium (He), neon (Ne) and hydrogen ( $H_2$ ), is suitable. Hydrogen may be specially preferred since it shows a low absorption of radiation in the EUV range. The driver gas inside cavity 22 is used as a source of electrons to start a discharge between anode and cathode. In some applications a separate driver gas or vapor may be dispensed with when any residual background pressure of working gas or vapor, or any other gas or vapor present, will prove to be sufficient inside cathode cavity 22.

**[0043]** The cathode cavity 22 surrounds a working gas or vapor source 60, which ejects a working gas or vapor in the anode-cathode gap in a region around central axis A. The working gas or vapor is chosen for its spectral emission as a plasma. The present embodiment uses lithium (Li) for its very strong emission line at approximately 13.5 nm. Xenon (Xe) may also be used, which has a broad emission spectrum in the XUV (and EUV) region of the electromagnetic radiation spectrum. Another option is to employ tin (Sn) instead of lithium. The Li source 60 shown comprises a heater 61 below a container 62 containing solid lithium to be converted into a liquid and vapor by heater 61. Vaporized Li reaches the anode-cathode gap through a Laval nozzle 63.

**[0044]** A trigger electrode 50 is inserted in cathode cavity 22. Electrode 50 is connected to appropriate electrical circuitry (not shown in figure 3) for applying a voltage pulse to the electrode to start the discharge described with respect to figure 2b and 2c. In the state shown in figure 2b, the radiation source is close to auto-triggering. A voltage pulse applied to trigger electrode 50 causes a disturbance of the electrical field within cathode cavity 22, which will cause triggering of the hollow cathode and the formation of a breakdown channel and subsequently a discharge between cathode 20 and anode 10. Trigger electrode 50 comprises a ring surrounding axis A within cathode cavity 22 and is connected to outside electronics.

**[0045]** Radiation emitted from a collapsed plasma will pass through an opening 11 in the anode 10 into a vacuum chamber 70 that is evacuated through opening 71

in a wall of the vacuum chamber. Plasma and debris particles may also escape through opening 11. A flywheel shutter 80 is present to block these particles when no XUV radiation pulse is emitted for preventing them to reach any optical elements in the radiation path of the XUV radiation to the projection system PL.

#### Embodiment 3

**[0046]** Figure 4 depicts a third embodiment of the invention, which is a variation to the second embodiment and further shields the aperture region of cathode 20 from plasma collapse at central axis A. Both anode 10 and cathode 20 have a "hat-like" structure. Annular cathode cavity 22 and aperture 21 are located at the bottom side of the hat. A plasma created by a discharge at aperture 21 will compress upwards and "around the corner" towards central axis A. Further, the positions of anode 10 and cathode 20 have been interchanged. Cathode 20 is located on the outside of the configuration and comprises aperture 23 for passing XUV radiation to vacuum chamber 70. Trigger electrode 50 in this embodiment takes the form of a needle electrode inserted in cathode cavity 22.

**[0047]** However, the density of the working gas or vapor, also Li vapor in the present embodiment, may be too low at annular aperture 21 of cathode 20 for creating a discharge and a plasma. In embodiment 3, the radiation source is configured so as to yield a sufficiently high pressure of the driver gas or vapor, Ar in the present embodiment, within the anode-cathode gap in the region at the annular aperture 21 for creating a discharge in the driver gas. The resulting plasma of the driver gas will start to compress towards central axis A and at some point encounter a sufficiently high pressure of the working gas or vapor to create a plasma of the working gas or vapor, which will then further compress until stagnation on central axis A. The plasma of the driver gas or vapor may even first have to go "around the corner" to reach a sufficiently high pressure of the working gas or vapor.

#### Embodiment 4

**[0048]** Figure 5 depicts an electrical circuit 100 of a radiation source according to a fourth embodiment of the invention and may be employed with the embodiments disclosed above. Electrical circuit 100 and a trigger electrode 50 may also be employed with a discharge plasma radiation source having a central hollow cathode, but are favorably employed with the annular hollow cathode concept.

**[0049]** In circuit 100 an AC voltage is rectified by rectifier 101 and applied to first capacitor bank C1 in a closed state of electronically controllable switch 110. Switch 110 may be put in a closed state by applying an appropriate pulse. First capacitor C1 is charged to a nominal voltage during a time interval that is (slightly)



shorter than a time interval between subsequent XUV radiation pulses.

**[0050]** When first capacitor C1 is charged, a second electronically controllable switch 120 is closed to charge second capacitor bank C2 through a transformer TV1 within a few microseconds to a working voltage in the range of 3-5 kV with a stored energy in the range of 5-10 J. Second capacitor bank C2 is connected to anode and cathode of the radiation source. Second capacitor bank C2 corresponds to capacitor bank 40 shown in figures 3 and 4.

**[0051]** Capacitor bank C2 will discharge when a discharge occurs between anode 10 and cathode 20. The discharge may be triggered as described with regard to the second embodiment using a trigger electrode 50 inserted in the cathode cavity 22. A voltage pulse may be supplied to trigger electrode 50 via a second transformer TV2.

#### Embodiment 5

**[0052]** Figure 6 schematically shows another embodiment of the invention, which incorporates a structure to pass lithium, or another appropriate material such as tin (Sn), to the anode-cathode gap by capillary action. Embodiment 5 corresponds to the previous embodiments save as described below. The structure may take the form of a tube 90 having an internal diameter of, for instance, 3 mm, one end of tube 90 being inserted in a bath 62 of lithium that is heated by heater 61 to such a temperature (in the order of 300°C or above) so as to make the lithium liquid. The liquid lithium is drawn into the internal passage of the tube and transported to the other end by capillary action. At this end the lithium is heated by another heater 91 (to approximately 700°C) to have the lithium leave the tube into the anode-cathode gap. The lithium will leave the tube according to some angular profile that generally is peaked along axis A. Depending on the dimensions of the exit opening of the tube, the lithium may leave the tube as a jet having an angular profile that is more sharply peaked than a thermal angular (cosine) distribution.

**[0053]** Figure 7 shows a porous rod 95 that may replace tube 90 in figure 6 for transporting lithium by capillary action to the anode-cathode gap. A chamber 96 is provided at the end of rod 95 near the anode-cathode gap to collect the lithium transported through the porous rod out of lithium bath 62. An opening 97 is provided in the chamber for the lithium to escape to the anode-cathode gap. Depending on the dimensions of the opening, the temperature of the lithium in the chamber (heated by heater 91 to a temperature in the order of 700°C) and the pressure of the lithium that builds up in the chamber, the lithium will leave opening 97 as a jet having some angular profile that may be sharply peaked along axis A.

**[0054]** Figure 6 shows further that the electrical insulator 30 between anode and cathode is positioned at some distance from the region where the lithium is in-

troduced in the anode-cathode gap. Lithium may chemically react with a ceramic isolator provided in between anode and cathode so as to erode it and/or make it electrically conductive, which both are to be avoided. To this end provisions are taken to prevent that lithium vapor in the anode-cathode gap will reach insulator 30. Measures are incorporated to condense lithium vapor before it may reach insulator 30 and the condensed lithium may be collected and transferred to lithium bath 62.

**[0055]** Figure 6 shows that the distance between the hot region of the anode-cathode gap where the plasma is formed and insulator 30 provides a sufficiently long and narrow path 150 having such a temperature that at some point along that path a 'freezing point' for vaporized lithium is provided. The path is sufficiently long and narrow to provide cooling of lithium vapor upon collision with the wall of the path. Additionally, the path may have a curved stretch 151 to yield an increased number of collisions between that wall and the vapor as is shown in the right-hand side of figure 6. Further, cooling elements 152 may be provided along the path as shown in the left-hand side. Path 150 presents in the embodiment shown upper and lower walls 155, 156 that circumscribe axis A, upper wall 155 being electrically connected to anode 10 and lower wall 156 being electrically connected to cathode 20.

**[0056]** For the lithium to condense, the temperature at the freezing point along the path should be at approximately 300°C or below. Having a temperature at approximately 300°C will keep the lithium liquid so that it can be easily collected and returned to the lithium bath. From figure 6 it is obvious how this is achieved by having the liquid flow by gravity down the wall of the path towards lithium bath 62.

**[0057]** Whilst specific embodiments of the invention have been described above, it will be appreciated that the invention may be practiced otherwise than as described. The description is not intended to limit the invention.

#### Claims

1. A radiation source comprising an anode and a cathode that are configured and arranged to create a discharge in a gas or vapor in a space between said anode and cathode and to form a plasma of a working gas or vapor so as to generate electromagnetic radiation, wherein said cathode comprises a hollow cavity having an aperture that has a substantially annular configuration around a central axis of said radiation source so as to initiate said discharge.
2. A radiation source according to claim 1, wherein said cavity has a substantially annular configuration around the central axis of the radiation source.
3. A radiation source according to claim 1 or 2, where-



in a driver gas or vapor is supplied to said cavity.

4. A radiation source according to claim 3, wherein said driver gas comprises at least one selected from the group comprising helium (He), neon (Ne), argon (Ar) and hydrogen (H<sub>2</sub>). 5
5. A radiation source according to any one of the preceding claims, wherein said working gas or vapor is supplied in a region around said central axis of said space between said anode and cathode. 10
6. A radiation source according to claim 5, wherein said working gas or vapor is supplied along said central axis. 15
7. A radiation source according to any one of the preceding claims, wherein said working gas or vapor comprises xenon. 20
8. A radiation source according to any one of the preceding claims, wherein said working gas or vapor comprises at least one selected from the group comprising lithium vapor and tin vapor. 25
9. A radiation source according to claim 8, wherein said radiation source comprises a holder for holding a material comprising at least one of lithium and tin, a heater for heating said holder so as to create a vapor of said material, and a structure for guiding said vapor to said space between said anode and cathode. 30
10. A radiation source according to claim 8, wherein said radiation source comprises a holder for holding a material comprising at least one of lithium and tin, a heater for heating said holder so as to create a liquid of said material, and a structure for guiding said liquid to said space between said anode and cathode by capillary action. 35
11. A radiation source according to any one of claims 8 to 10, wherein an electrical insulator is provided in between said anode and cathode, and a path between a region of said space between said anode and cathode where said vapor is provided and said electrical insulator is constructed and arranged to define a space for said vapor to condense along said path. 40 50
12. A radiation source according to any one of the preceding claims, wherein a trigger electrode is inserted in said cavity. 55
13. A radiation source according to claim 12, wherein

said radiation source comprises an electrical circuit constructed and arranged to apply a voltage pulse to said trigger electrode.

14. A radiation source according to claim 13, wherein said electrical circuit comprises a transformer having primary and secondary windings, said primary windings being connected to a source for said voltage pulse and said secondary windings being connected to said cathode and said trigger electrode.
15. A radiation source according to any one of the preceding claims, wherein said radiation source is adapted to generate a projection beam of extreme ultraviolet radiation, e.g. having a wavelength in the range of from 5 to 20 nm, especially 9 to 16 nm.
16. A lithographic projection apparatus comprising:
  - a radiation system for providing a projection beam of radiation;
  - a support structure for supporting patterning means, the patterning means serving to pattern the projection beam according to a desired pattern;
  - a substrate table for holding a substrate; and
  - a projection system for projecting the patterned beam onto a target portion of the substrate,
 wherein said radiation system comprises a radiation source according to any one of claims 1 to 15.
17. An apparatus according to claim 16, wherein said support structure comprises a mask table for holding a mask.
18. A device manufacturing method comprising the steps of:
  - providing a substrate that is at least partially covered by a layer of radiation-sensitive material;
  - providing a projection beam of radiation using a radiation system comprising a radiation source according to any one of claims 1 to 15; using patterning means to endow the projection beam with a pattern in its cross-section; and
  - projecting the patterned beam of radiation onto a target portion of the layer of radiation-sensitive material.
19. A device manufactured in accordance with the method of claim 18.

Fig.1.

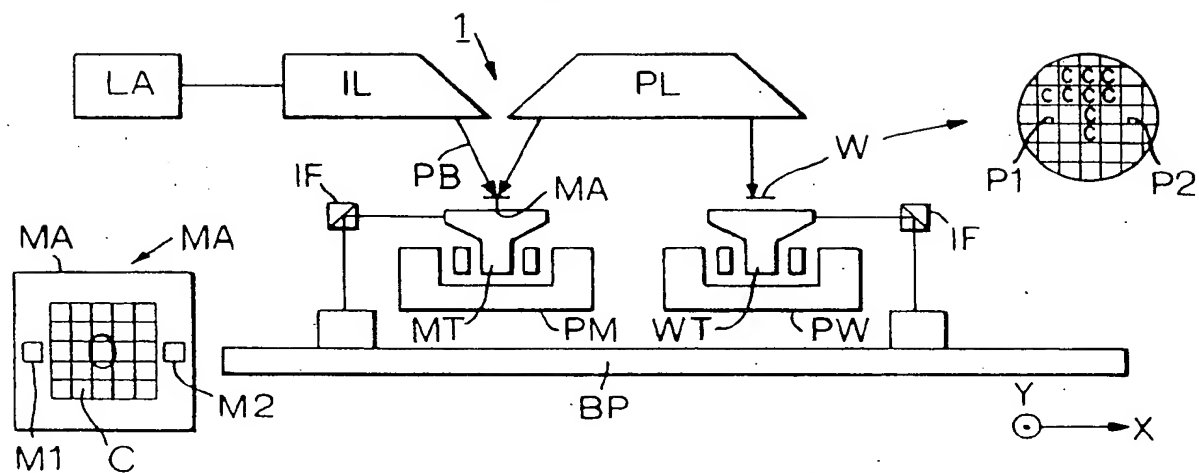


Fig.5.

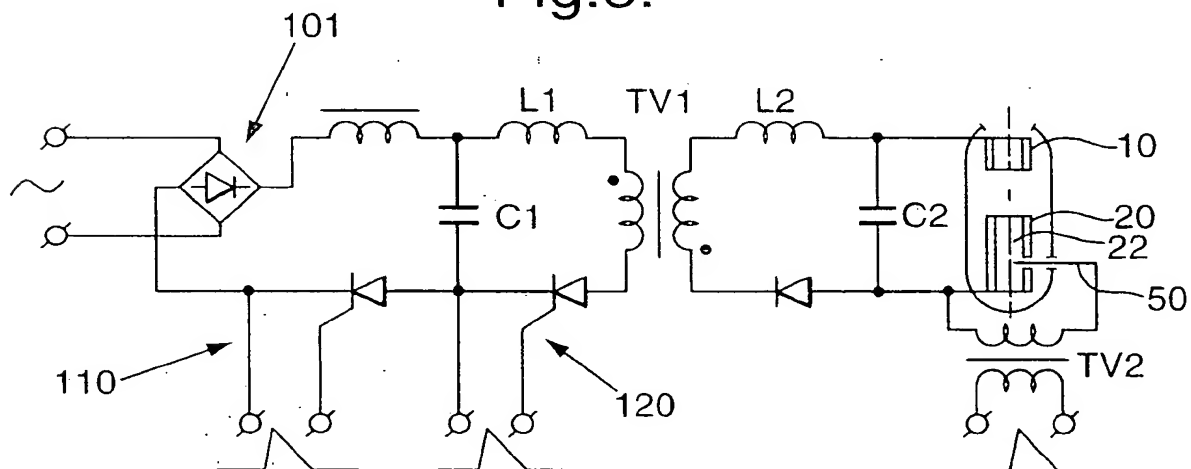


Fig.2a.

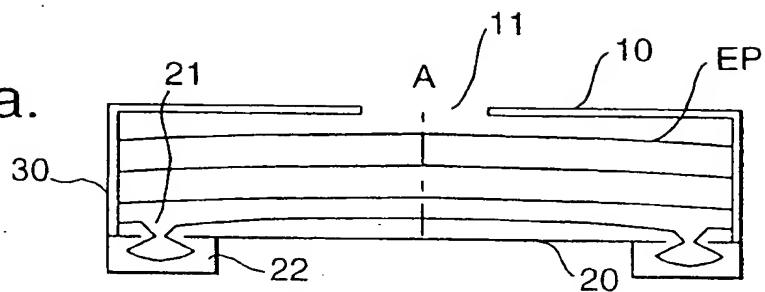


Fig.2b.

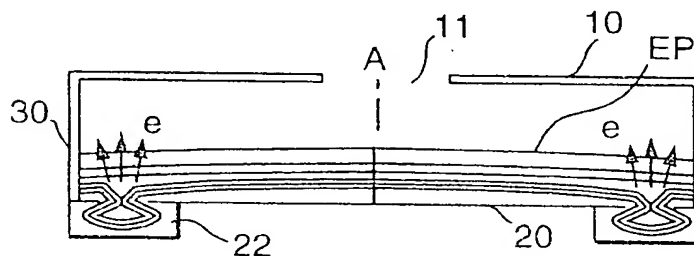


Fig.2c.

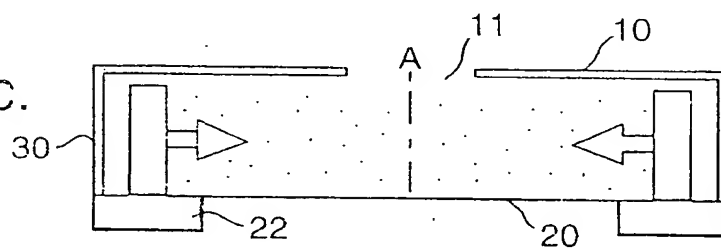


Fig.2d.

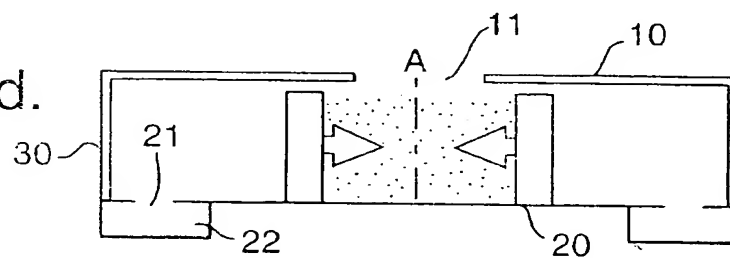


Fig.2e.

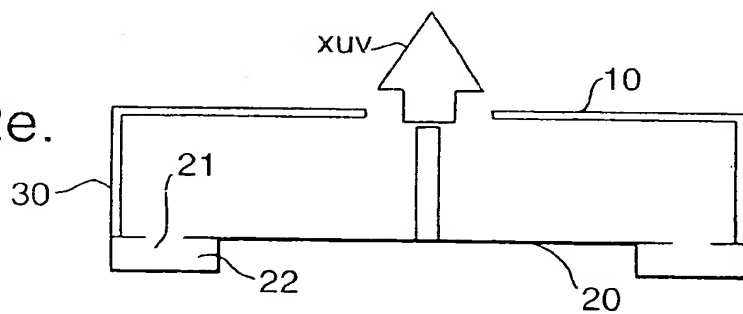


Fig.3.

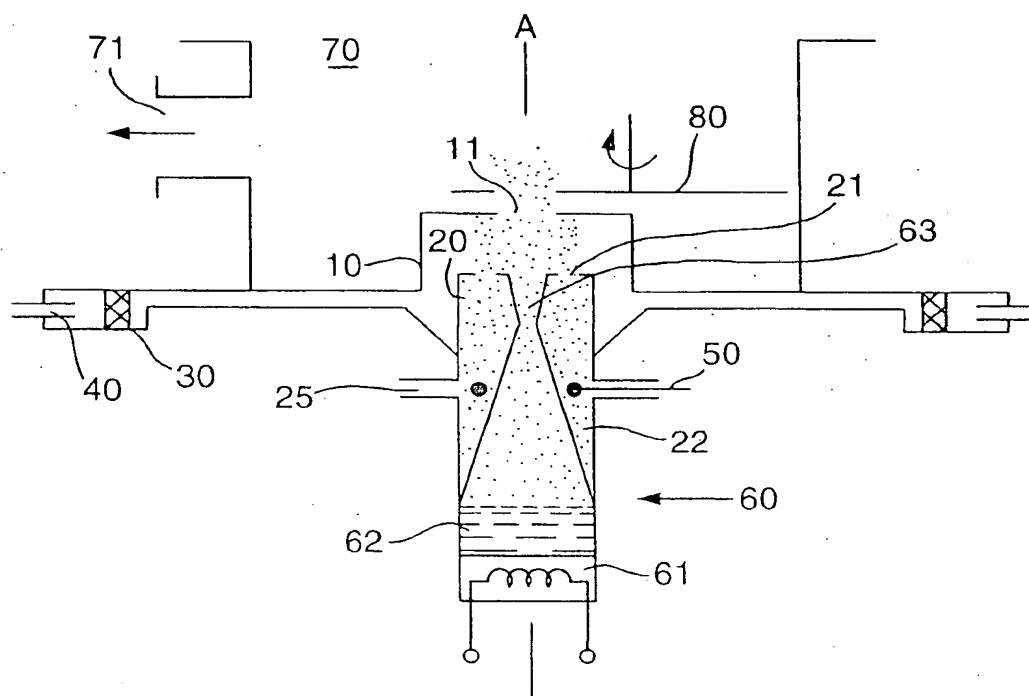


Fig.4.

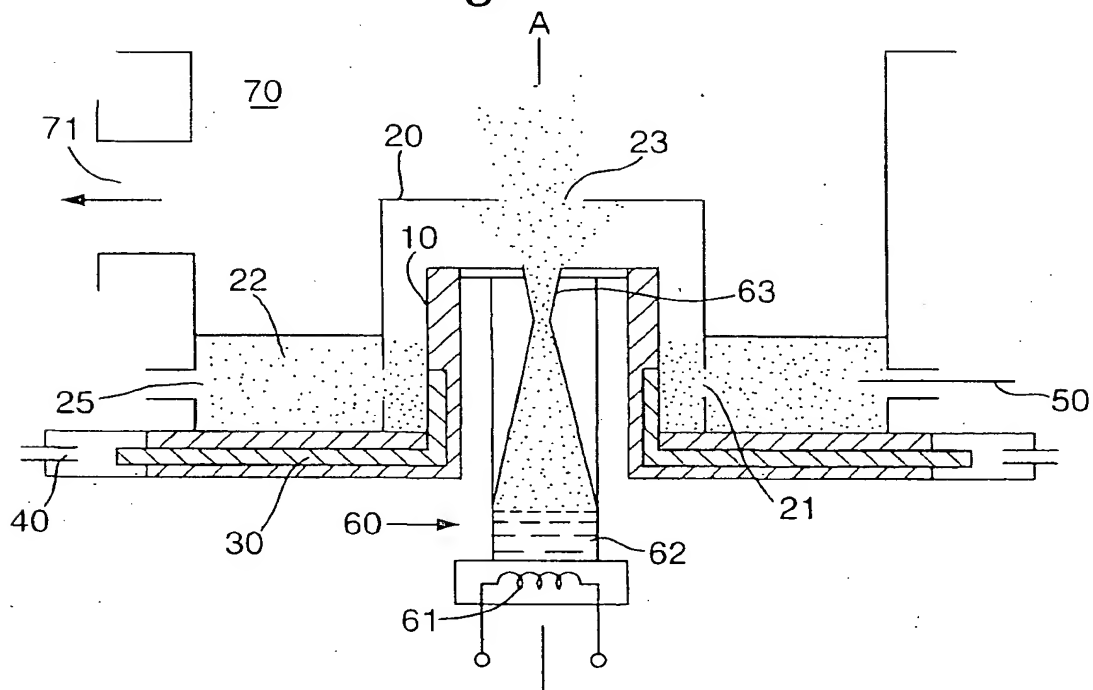


Fig.6.


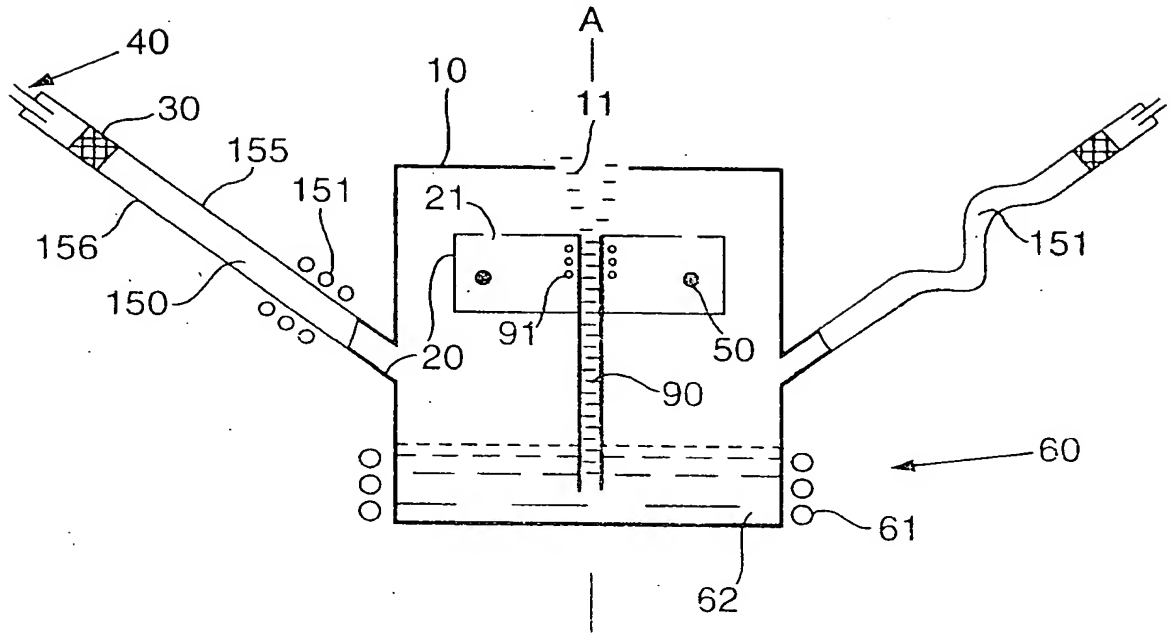


Fig.7.



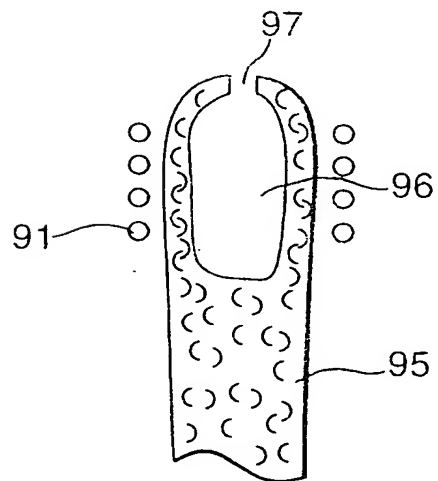

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 5671

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 4 494 043 A (STALLINGS CHARLES H ET AL) 15 January 1985 (1985-01-15)	1-3,5,6	H05G2/00 G03F7/20
Y	* abstract; figure 1 *	4,7, 15-19	
Y	* column 4, line 57 - line 61 *		
Y	EP 0 480 617 A (AMERICAN TELEPHONE & TELEGRAPH) 15 April 1992 (1992-04-15) * page 3, line 35 - line 52 * * page 4, line 24 - line 26 *	16-19	
Y	BERGMANN K ET AL: "HIGHLY REPETITIVE, EXTREME-ULTRAVIOLET RADIATION SOURCE BASED ON A GAS-DISCHARGE PLASMA" APPLIED OPTICS, OPTICAL SOCIETY OF AMERICA, WASHINGTON, US, vol. 38, no. 25, 1 September 1999 (1999-09-01), pages 5413-5417, XP000854494 ISSN: 0003-6935 * abstract *	7,15	
Y	PATENT ABSTRACTS OF JAPAN vol. 012, no. 017 (E-574), 19 January 1988 (1988-01-19) & JP 62 176038 A (HITACHI LTD), 1 August 1987 (1987-08-01) * abstract *	4	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> H05G G03F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 October 2001	Examiner Oestreich, S
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (FOX001)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 5671

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	VA'VRA J ET AL: "Soft X-ray production in spark discharges in hydrogen, nitrogen, air, argon and xenon gases" NUCLEAR INSTRUMENTS & METHODS IN PHYSICS RESEARCH, SECTION - A: ACCELERATORS, SPECTROMETERS, DETECTORS AND ASSOCIATED EQUIPMENT, NORTH-HOLLAND PUBLISHING COMPANY, AMSTERDAM, NL, vol. 418, no. 2-3, December 1998 (1998-12), pages 405-419, XP004149937 ISSN: 0168-9002 * abstract *	4,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 October 2001	Examiner Oestreich, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant; if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EP FORM 1503 03.82 (104031)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 5671

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-10-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4494043	A	15-01-1985	NONE	
<hr/>				
EP 0480617	A	15-04-1992	CA 2052733 A1	11-04-1992
			CA 2052734 A1	11-04-1992
			DE 69122018 D1	17-10-1996
			DE 69122018 T2	06-02-1997
			EP 0480617 A2	15-04-1992
			HK 215996 A	27-12-1996
			JP 4262524 A	17-09-1992
			KR 221678 B1	15-09-1999
			US 5315629 A	24-05-1994
<hr/>				
JP 62176038	A	01-08-1987	NONE	
<hr/>				

EPO FORM P0159

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82